

TIMBER CONTAINER 20 FEET



Sawn, primed, painted timber.

Openable two parts window.

Aluminium safety roller .



Plumbing Ø 3/4" and sewerage Ø 110 mm.

⏏ GND connector.


TIMBER CONTAINER 20 FEET



Thermo faucet



Welded and turned on wall pvc flooring.
Hermetic lifted threshold in WC.
Tested plumbing system, pressure reducer.
Water outlet in floor.

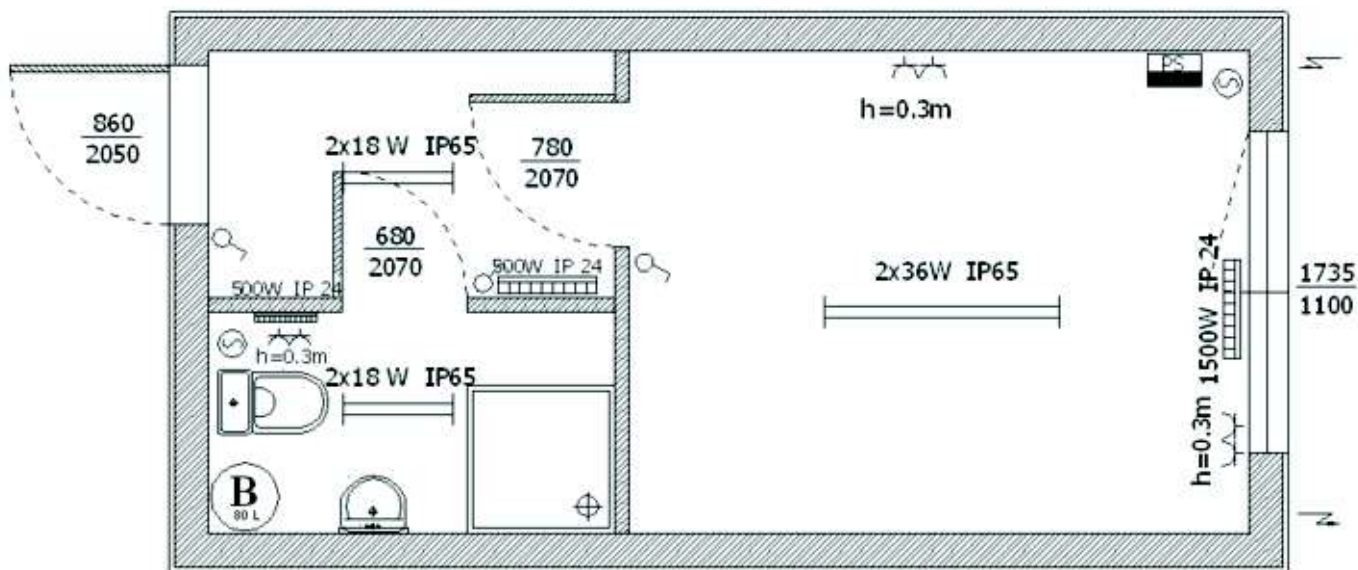

20" hw container with traditional solid wall.
L 6058 x W 3028 x H 2800 external dimensions;
L 5635 x W 2604 x H 2345 internal dimensions;

Roof 200 mm MW, snow load 250 kg/m²;
Walls 150 mm MW, timber frame system, U=0,247 w/m²k;
Floor 200 mm MW, load capacity 200 kg/m².